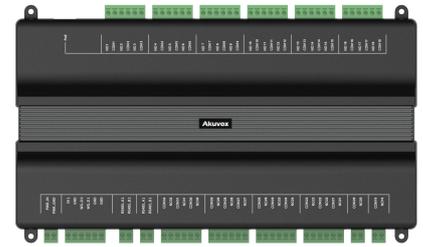


Reliable access controller for your building

The Akuvox EC33P is an IP elevator controller which uses HTTP commands to communicate with other Akuvox devices. Each controller has 32 outputs and can expand to 128 outputs.

***At a Glance***

- 10/100M Ethernet;
- Large storage for 20,000 card and 100,000 logs;
- EC33P supports 32 outputs and can connect to an expansion controller to expand to 128 outputs;
- RS485 port to connect to a expansion controller;
- Fire Alarm input to support emergency door release or normal lift commands;
- Works with other Akuvox devices by using HTTP commands;
- Akuvox Cloud supported;

Physical & Power

- Communication: TCP/IP
- RS485: Support
- Relays out: 32
- Wiegand: Wiegand 26/34
- RS485: Support
- RJ45 port: 1
- Fire alarm input: 1
- Power supply: 100 ~ 240VAC Input or PoE
- PoE: IEEE802.3af PoE
- Rated power: $\leq 10W$
- Working temperature: $< 45^{\circ}C$
- Working humidity: 10%~90%
- Dimension: 292 x 156 x 32 (mm)